

V&T AC DRIVE PRODUCT CATALOGUE



English Version: VX-20230228-H-1.0 (BOM:37110050) print for the first time
This document is subject to change without notice. All rights reserved. Any unauthorized reproduction or copy is forbidden.

Shenzhen V&T Technologies Co.,Ltd.

Headquarters Address: Kenuo Building, Kenuo Industrial Park, No. 7 Road, Tongguan Avenue, Guangming District, Shenzhen City, China.
Post Code: 518055
Company Tel: (+86)400-080-1199
Market Department Tel: (+86)0755-26580820
Service Department Tel: (+86)0755-26580830
Fax: (+86)0755-26580821
Chinese website: www.v-t.com
Overseas website: www.vectorque.com
E-mail: overseas@v-t.net.cn

- V9 Series Universal Variable Speed AC Drives
- VTS Series High Performance Multi-functional AC Drives
- DTS800/VTS800 Series Multi-drives/AFE
- VA Series Drives for Machine Tool Spindles
- V6/V5/E5 Series Universal Inverter
- FV20 Mini Series Inverter
- VTF Series Regenerative Braking Unit
- Electric Vehicle Motor Controller
- Integrated Elevator Controller



Shenzhen V&T Technologies Co.,Ltd.
Listed Company, Stock Code: 300484

Company Introduction

Shenzhen V&T Technologies Co., Ltd. was certificated as a "National Hi-tech and Double-Software Enterprise", which has fully intellectual property rights and devotes to the R&D, manufacture, sales and technical service of Inverter, Servo Drive, Electric Vehicle Motor Controller, etc. V&T has won the "Technical Innovation" prize awarded by the Inverter Industry Association, "The Most Competitive Brands" prize awarded by China Electrical Association, "2012 Electric Vehicle Excellent Technology" prize respectively awarded by China Electro-technical Society (CES), the Specialized Committee of Electric Vehicles, the Automotive Engineering Society of China, and the Branch Association of Electric Vehicles. V&T has been ranked as one of the "Top 10 Chinese Inverter Enterprises". V&T successfully listed on the Shenzhen Stock Exchange in 2016 (stock code: 300484).

In regard to core and mainstream motor control technologies, Shenzhen V&T Technologies Co., Ltd. has mastered both advanced "Vector Control" and "Torque Control" technology so far. Through continuous technological innovation, international technical exchange and cooperation with other countries, V&T has completely grasped the key control technique, and also possesses the capacity of industrialization design and manufacturing. Our company has developed and reserved many product series. The product voltage grade mainly contains 200V, 400V, 690V, and the power grade varies from 0.4kW to 3000kW, which can meet various application demands for high, medium and low-end market.

Under the premise of meeting international standards and satisfying different industries' application requirements, we further strengthen the product reliability and environment adaptability to suit harsh and extreme environments. Customized product and industrialized design can better meet medium and high-end application demands. The products have been widely used in electric vehicles, metallurgy, crane, oil, chemicals, machine tools, metal processing, building materials, stone, wood processing, ceramics, plastics, air compressor, washing machine, water supply, air conditioning, municipal engineering, textile, printing, mining, solar pump and other industries.

Main Product Series

Product Series

- V9 Series Universal Variable Speed AC Drives (Voltage: 3AC200V, 3AC400V, 3AC690V, power range: 0.4kW~710kW)
- VTS30 Series Universal Variable Speed AC Drives (Voltage: 3AC400V, power range: 0.75kW~500kW)
- VTS400 Series High Performance Multi-functional AC Drives (Voltage: 3AC400V, power range: 5.5kW~500kW)
- DTS800 Series DTC Control Type Multi-drives / AFE (Voltage: DC540V, DC980V, power range: 75kW~560kW, up to 4 drives can be connected in parallel for higher power.)
- VTS800 Series Vector Control Type Multi-drives (Voltage: DC540V, DC980V, power range: 75kW~560kW)
- VA Series Drives for Machine Tool Spindles (Voltage: 3AC400V, power range: 3.7kW~160kW)
- VTF Series Regenerative Braking Unit (Power grid: 3AC400V, power range: 11kW-110kW, up to 10 RBUs can be connected in parallel for higher power)
- V6/V5/E5 Series Universal Inverter (Voltage: 3AC200V, 3AC400V, 3AC690V, power range: 0.4kW~710kW)
- FV20 Mini Series Inverter (Voltage: 3AC200V, 3AC400V, power range: 0.4kW~2.2kW)

Dedicated Drive

- V9-T Series VFD for Tension Control
- V9-GH/GA Series VFD for Crane
- V9-H-HCF High Switching Frequency Inverter
- V9-H-P0 Series VFD for Water Supply
- V9-H-H3 Series High Frequency Inverter
- V9-H-C9 Series VFD for VF Independent Control
- Electric vehicle motor controller
- Integrated Elevator Controller
- Integrated Control Cabinet for Energy Saving



V9 Series Product Features

Multiple Functions

- Advanced motor control algorithm, unified asynchronous motor and synchronous motor control.
- **Motor control mode:** synchronous motor sensor vector control, synchronous motor sensor-less vector control, asynchronous motor sensor vector control, asynchronous motor V/F control, asynchronous motor sensor-less vector control 1, asynchronous motor sensor-less vector control 2
- **Support multiple system control modes:** position control, speed control, torque control.
- **Applicable to drive a variety of motors:** asynchronous motor, permanent magnet synchronous motor, direct-drive motor, machine tool spindle, servo motor, conical motor, in-wheel-motor, magnetic suspension motor, air suspension motor, etc.



Wide Voltage Range and Product Range

- 2AC220V: power range from 0.4kW to 2.2kW
- 3AC220V: power range from 0.4kW to 132kW
- 3AC380V: power range from 0.75kW to 710kW
- 3AC690V: power range from 15kW to 710kW

Various Encoder Interface Cards Available

- Open collector, voltage, push-pull (complementary) type incremental encoder
- TTL differential type encoder
- Resolver
- Sin/Cos encoder (VA series)



Multiple Communication Cards Available

- Modbus-RTU as standard
- EX-CA04 CANOpen adapter card
- EX-CA06 Profibus-DP adapter card
- EX-CA13 ProfiNet adapter card
- EtherCAT (VA series)



Multi-functional Keypad

- V9-DP01 LED keypad and V9-DP02 LCD keypad are available.
- The Keypad and control board can be connected by standard network cable.
- The Keypad can be used to upload and download parameters, convenient for commissioning.
- The keypad can be set a password and/or the keypad keys can be locked.




V9-DP01



V9-DP02


Description of LCD Keypad Display Functions

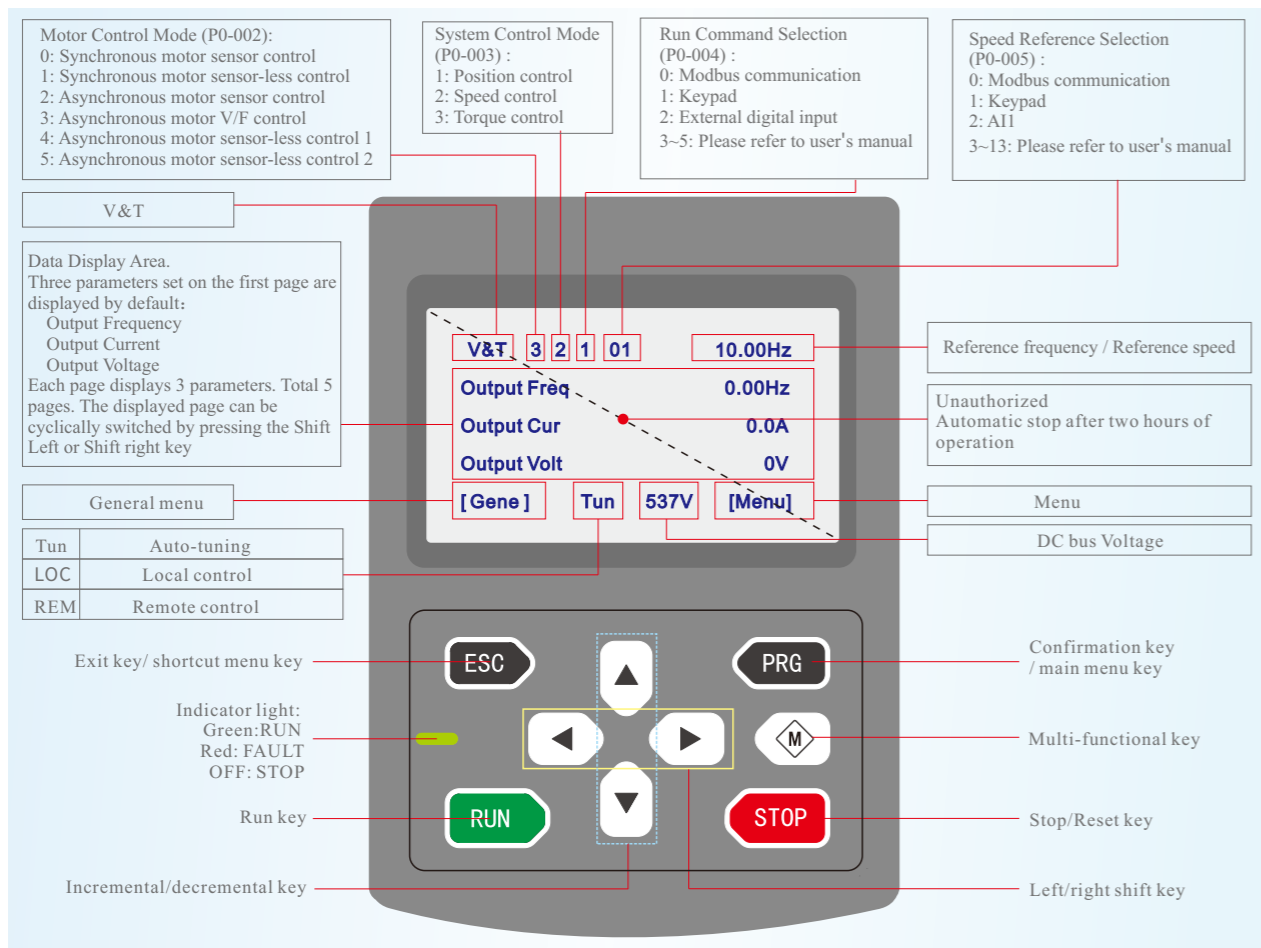

Product Specifications

Control characteristics	Control mode	Sensor-less control	Sensor control
	Applicable motor type	Synchronous motor Asynchronous motor	Synchronous motor Asynchronous motor
	Starting torque	<ul style="list-style-type: none"> Asynchronous motor: 200% of rated torque at 0.25Hz Synchronous motor: 150% of rated torque at 1.5% of rated speed 	200% of rated torque at 0 speed
	Speed regulation range	1:200	1:5000
	Steady speed precision	± 0.5%	± 0.02%
	Maximum speed	VF control: 600Hz Vector control: 600 Hz Note: Higher frequency products can be customized	600Hz Note: Higher frequency products can be customized
	Torque control	Y	Y
	Torque control precision	±5%	±3%
	Torque response time	<20ms	<10ms
	Positioning control	N	Y
Positioning precision	N	±1 pulse	
Product function	Key function	Torque limit, speed control, positioning control, motor auto tune, deep flux-weakening control, current limit control, over-voltage control, under-voltage control, motor speed tracing function, droop control, oscillation suppression, random carrier frequency, inertia auto-tune, etc.	
	Speed reference source	Modbus communication, Keypad, external digital input, analog AI1/AI2/AI3, high speed pulse input, simple PLC, PID, CAN, PROFIBUS DP, PROFINET, etc.	
	Dynamic brake	Brake chopper action voltage: 650 ~ 750V (400V series product) The brake chopper can be built-in for 110kW and below equipment <ul style="list-style-type: none"> • 0.75~15kW: brake chopper is built-in as standard. • 18.5~110kW: brake chopper is built-in as optional. 	
	Communication	Built-in Modbus-RTU communication, the maximum distance up to 500 meters.	
	Keypad	LED Keypad and LCD Keypad are optional the Keypad can be used as remote-control box via straight-through wired cable.	
	Common DC bus	Support common DC bus directly	
Protection function	Independent air duct	All series product adopts independent duct design	
	Protection function	Power supply under-voltage, over-current protection, over-voltage protection, auto-tune fault, module protection, heat-sink overtemperature protection, drive overload protection, motor overload protection, peripheral protection, current abnormal detection, output short-circuit to ground protection, EEPROM abnormal detection, temperature sampling disconnection, encoder disconnection, analog input abnormal detection, motor overtemperature, communication fault, hardware overload protection, etc.	
Efficiency	Efficiency	At rating condition: <ul style="list-style-type: none"> • 0.75kW to 7.5kW: ≥93% • 11kW to 45kW: ≥95% • 55kW and higher power class: ≥98% 	
	Operating site	<ul style="list-style-type: none"> • Install vertically in a well-ventilated electrical cabinet. Horizontal or other installation methods are not allowed. • The cooling medium is air. • Installed in an environment free from direct sunlight, dust, corrosive gases, flammable gases, no oil mist, no steam, no dripping. 	
Environment	Ambient temperature	<ul style="list-style-type: none"> • -10~+40°C • Derating use when the temperature between 40 to 50°C, the rated output current is reduced by 1% for every 1°C increasing. 	
	Humidity	5~95%, no condensation is allowed.	
	Altitude	<ul style="list-style-type: none"> • 0~2000 meters • Derating use when the altitude over 1000 meters, the rated output current is reduced by 1% for every 100-meter rising. 	
	Vibration	<ul style="list-style-type: none"> • 3.5 m/s², 2~9Hz • 10 m/s², 9~200Hz • 15 m/s², 200~500Hz 	
	Storage temperature	-40~+70°C.	

Description of the Product Model

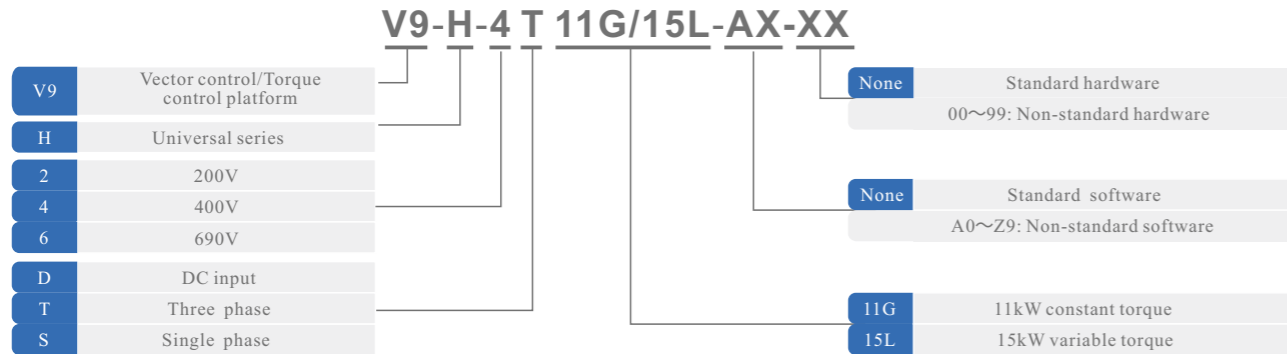

Product Series

V9-H-2T□□□G Three-phase 200V constant torque / heavy load application

Rated Power (kW)	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	
Applicable motor (kW)	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	
Output	Voltage (V)	Three-phase 0 to rated input voltage														
	Rated current (A)	16.5	24	30	45	60	73	96	112	144	176	210	288	350	432	520
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)														
Input	Rated voltage / frequency	Three-phase 200V-240V; 50Hz/60Hz														
	Allowable voltage	180V ~ 260V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%														
	Rated current (A)	18	26	33	50	66	80	106	123	158	160*	196*	232*	326*	385*	49*
Brake chopper	Built-in as standard			Built-in brake chopper is optional						External brake chopper						
Protection level	IP20															
Cooling mode	Force air cooling															

V9-H-4T□□□G Three phase 400V constant torque / heavy load application

Rated Power (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	
Applicable motor (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	
Output	Voltage (V)	Three-phase 0 to rated input voltage																
	Rated current (A)	2.5	3.8	5.5	9	13	17	24	30	39	45	60	75	91	112	150	176	210
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)																
Input	Rated voltage / frequency	Three-phase 380V/480V; 50Hz/60Hz																
	Allowable voltage	323V ~ 528V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%																
	Rated current (A)	2.8	4.2	6.1	10	15	19	26	33	43	50	66	83	100	123	165	194	231
DC reactor	Without built-in DC reactor								Built-in DC reactor as optional									
Brake chopper	Built-in as standard								Built-in as optional									
Protection level	IP20																	
Cooling mode	Natural cooling			Force air cooling														
Rated Power (kW)	132	160	185	200	220	250	280	315	355	400	450	500	560	630				
Applicable motor (kW)	132	160	185	200	220	250	280	315	355	400	450	500	560	630				
Output	Voltage (V)	Three-phase 0 to rated input voltage																
	Rated current (A)	253	304	350	380	426	470	520	600	650	690	775	860	950	1100			
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)																
Input	Rated voltage / frequency	Three-phase 380V/480V; 50Hz/60Hz																
	Allowable voltage	323V ~ 528V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%																
	Rated current (A)	232	282	326	352	385	437	491	580	624	670	755	840	920	1050			
DC reactor	Built-in DC reactor as standard			External DC reactor as standard							Built-in AC reactor as standard							
Brake chopper	External																	
Protection level	IP20																	
Cooling mode	Force air cooling																	

Product Series


V9-H-4T□□□L Three phase 400V variable torque / light load application

Rated Power (kW)	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	
Applicable motor (kW)	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	
Output	Voltage (V)	Three-phase 0 to rated input voltage																
	Rated current (A)	3.3	5.0	7.5	11	17	22	29	35	45	57	70	91	110	144	180	216	242
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)																
Input	Rated voltage / frequency	Three-phase 380V/480V; 50Hz/60Hz																
	Allowable voltage	323V ~ 528V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%																
	Rated current (A)	3.6	5.5	8.3	12	19	25	32	39	50	61	77	100	121	158	198	238	266
DC reactor	Without built-in DC reactor								Built-in DC reactor as optional									
Brake chopper	Built-in as standard								Built-in as optional									
Protection level	IP20																	
Cooling mode	Natural cooling			Force air cooling														
Rated Power (kW)	160	185	200	220	250	280	315	355	400	450	500	560	630	710				
Applicable motor (kW)	160	185	200	220	250	280	315	355	400	450	500	560	630	710				
Output	Voltage (V)	Three-phase 0 to rated input voltage																
	Rated current (A)	325	365	405	440	495	547	610	695	770	866	950	1100	1200	1300			
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)																
Input	Rated voltage / frequency	Three-phase 380V/480V; 50Hz/60Hz																
	Allowable voltage	323V ~ 528V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%																
	Rated current (A)	282	326	352	385	437	491	580	670	755	840	920	1050	1150	1250			
DC reactor	Built-in DC reactor as standard			External DC reactor as standard							Built-in AC reactor as standard							
Brake chopper	External																	
Protection level	IP20																	
Cooling mode	Force air cooling																	


V9-H-6T□□□G Three phase 690V constant torque / heavy load application

Rated Power (kW)	15	18.5	22	30	37	45	55	75	90	110	132	160	185	200	220	
Applicable motor (kW)	15	18.5	22	30	37	45	55	75	90	110	132	160	185	200	220	
Output	Voltage (V)	Three-phase 0 to rated input voltage														
	Rated current (A)	20	25	28	35	45	52	65	86	98	120	150	176	204	220	245
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)														
Input	Rated voltage / frequency	Three-phase 660V/690V; 50Hz/60Hz														
	Allowable voltage	587V ~ 793V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%														
	Rated current (A)	25	30	35	40	47	52	65	85	96	116	145	168	196	210	230
Protection level	IP20															
Cooling mode	Force air cooling															
Rated Power (kW)	250	280	315	355	400	450	500	560	630	710	800					
Applicable motor (kW)	250	280	315	355	400	450	500	560	630	710	800					
Output	Voltage (V)	Three-phase 0 to rated input voltage														
	Rated current (A)	275	325	350	395	435	490	545	600	680	770	860				
	Overload capability	150% for 60s, 180% for 10s, 200% for 0.5s, interval: 10 minutes (Inverse time characteristic)														
Input	Rated voltage / frequency	Three-phase 660V/690V; 50Hz/60Hz														
	Allowable voltage	587V ~ 793V; voltage imbalance ≤3%; allowable frequency fluctuation: ±5%														
	Rated current (A)	255	290	335	378	415	466	520	580	655	750	840				
Protection level	IP20															
Cooling mode	Force air cooling															


Product Outline, Mounting Dimension, and Weight

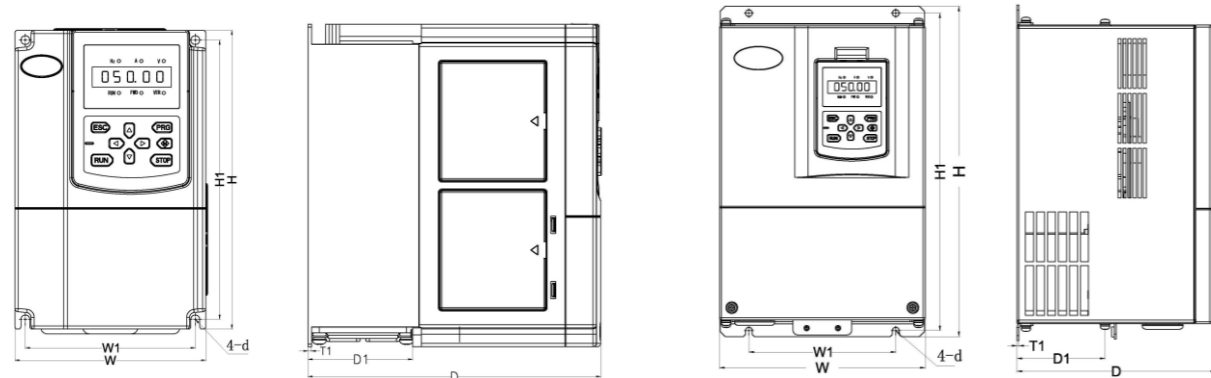


V9-H-4T7.5G/11L and below power class
V9-H-2T3.7G and below power class

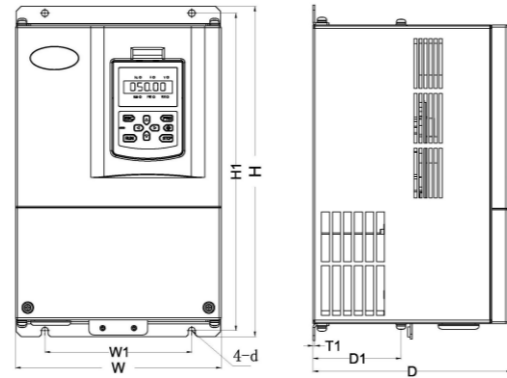

V9-H-4T11G/15L and above power class
V9-H-2T5.5G and above power class
V9-H-6T15G and above power class(Without Base)

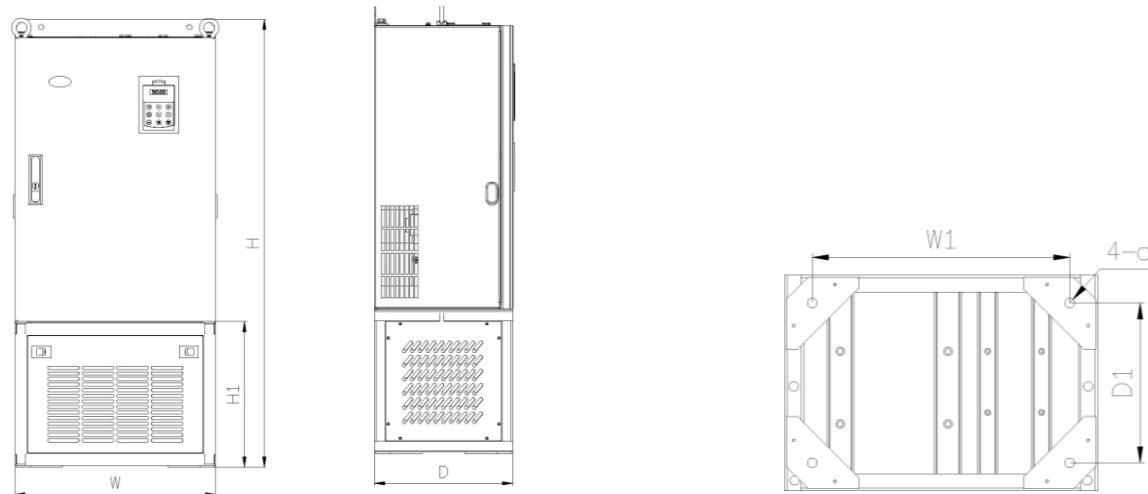

V9-H-6T110G-V9-H-6T630G (With Base)

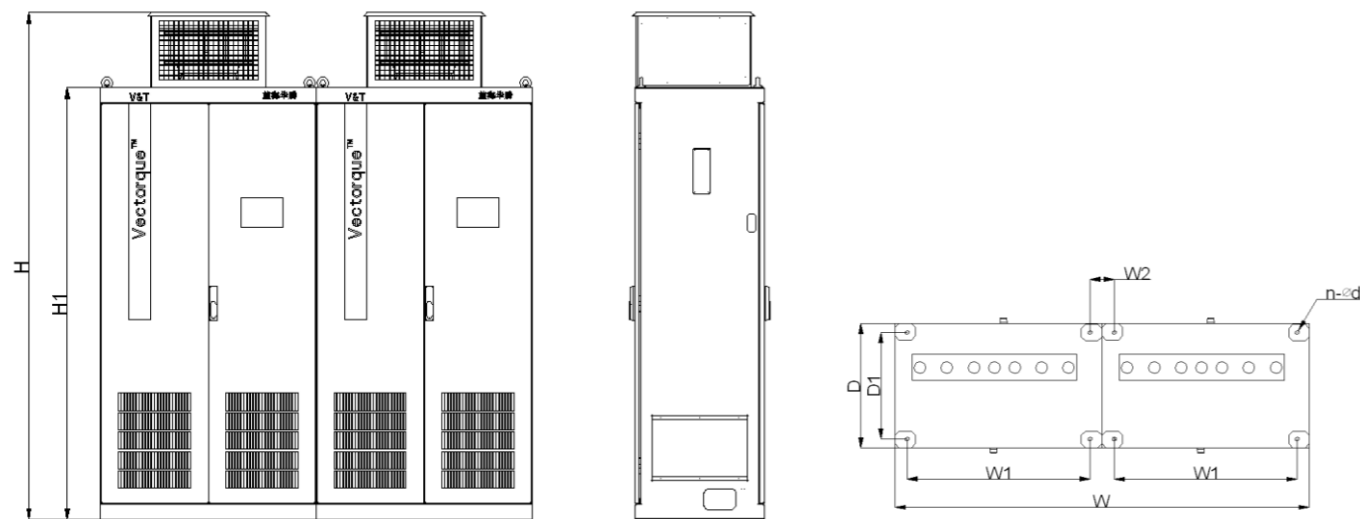

V9-H-4T315G-GS-V9-H-4710G-GS
V9-H-6T280G-GS-V9-H-6T710G-GS

Note: This machine can be added power distribution cabinet with 500mm width. Other sizes are similar to cabinet and switch components can be specified by customers.

■ Dimensions of 220V/400V Products

Voltage	Model	Outline and mounting dimension (mm)							Approximate weight (kg)
		W	H	D	W1	H1	T1	Mounting hole d	
200V	V9-H-2T3.7G	155	249	185	136	232	8	5.5	3
	V9-H-2T5.5G	198	299	190	160	283	1.2	6	8
	V9-H-2T7.5G	223	348	208	195	335	1.5	6	10
	V9-H-2T11G	264	430	235	230	418	1.5	7	18
	V9-H-2T18.5G	305	545	270	245	523	1.5	10	35
	V9-H-2T22G	338	580	310	270	560	1.5	10	52
	V9-H-2T30G	400	917	323	320	890	3.0	12	75
	V9-H-2T37G	540	890	385	370	855	4.0	14	85
	V9-H-2T45G	700	1010	385	520	977	4.0	14	125
	V9-H-2T55G	700	1010	418.5	520	977	4.0	14	135
	V9-H-2T75G	810	1358	425	520	1300	4.0	14	215
	V9-H-2T90G	810	1358	425	520	1300	4.0	14	215
	V9-H-2T110G	810	1358	425	520	1300	4.0	14	215
	V9-H-2T132G	810	1358	425	520	1300	4.0	14	215
400V	V9-H-4T0.75G/1.5L	118	190	155	105	173	3	5.5	1.5
	V9-H-4T1.5G/2.2L	118	190	175	105	173	4	5.5	2.6
	V9-H-4T2.2G/3.7L	118	190	175	105	173	4	5.5	2.6
	V9-H-4T3.7G/5.5L	155	249	185	136	232	8	5.5	3
	V9-H-4T5.5G/7.5L	198	299	190	160	283	1.2	6	8
	V9-H-4T7.5G/11L	223	348	208	195	335	1.5	6	10
	V9-H-4T11G/15L	264	430	235	230	418	1.5	7	18
	V9-H-4T15G/18.5L	305	545	270	245	523	1.5	10	35
	V9-H-4T18.5G/22L	338	580	310	270	560	1.5	10	52
	V9-H-4T22G/30L	400	917	323	320	890	3.0	12	75
	V9-H-4T30G/37L	540	890	385	370	855	4.0	14	85
	V9-H-4T37G/45L	540	890	416	370	855	4.0	14	90
	V9-H-4T45G/55L	700	1010	385	520	977	4.0	14	125
	V9-H-4T55G/75L	700	1010	418.5	520	977	4.0	14	135
	V9-H-4T75G/90L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T90G/110L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T110G/132L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T132G/160L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T160G/85L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T185G/200L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T200G/220L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T220G/250L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T250G/280L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T280G/315L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T315G/355L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T355G/400L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T400G/450L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T450G/500L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T500G/560L	810	1358	425	520	1300	4.0	14	215
	V9-H-4T315G/355L-GS	1000	2351.5	600	-	-	-	-	430
V9-H-4T355G/400L-GS	1000	2351.5	600	-	-	-	-	440	
V9-H-4T400G/450L-GS	1000	2351.5	600	-	-	-	-	450	
V9-H-4T450G/500L-GS	1000	2351.5	600	-	-	-	-	480	
V9-H-4T500G/560L-GS	1000	2351.5	600	-	-	-	-	480	
V9-H-4T560G/630L-GS	1000	2351.5	600	-	-	-	-	500	
V9-H-4T630G/710L-GS	1000	2351.5	600	-	-	-	-	520	

■ Dimensions of 690V Products

Voltage	Model	Power Range (kW)	Base	Outline and mounting dimension (mm)								Approximate Weight (kg)	
				W	H	D	W1	H1	D1	T1	d		
690V	V9-H-6T15G ~ V9-H-6T30G	15~30	No	285	440	220	200	425	107.5	2.5	7	17	
	V9-H-6T75G ~ V9-H-6T150G	37~55	No	315	575	227	220	553	123.5	2.5	10	25	
	V9-H-6T75G ~ V9-H-6T90G	75~90	No	400	615	265	270	590	123.5	3.0	10	35	
	V9-H-6T110G ~ V9-H-6T132G	110~132	Yes	465	1042	325	382	339	238	—	14	—	
	V9-H-6T160G ~ V9-H-6T220G	160~220	No	540	890	385	370	855	205.5	4.0	14	85	
	V9-H-6T250G ~ V9-H-6T355G	250~355	Yes	700	1380	385	614	412	294	—	15	—	
	V9-H-6T400G ~ V9-H-6T630G	400~630	No	810	1698	425	728	418	339	—	15	—	
				No	810	1358	425	520	1300	210	4.0	14	215


■ Dimensions of 690V Products (Cabinet Type)

Voltage	Model	Power Range (kW)	Outline and mounting dimension (mm)								Approximate Weight (kg)	
			W	H	D	W1	H1	D1	W2	n		d
690V	V9-H-6T280G-GS ~ V9-H-6T450G-GS	280kW~450 kW	800	2352	600	684	2000	516		4	20	530
	V9-H-6T500G-GS ~ V9-H-6T710G-GS	500 kW~710 kW	1000	2352	600	884	2000	516		4	20	600

Optional Accessories

Name	Card model	Ordering model	Description
LCD Keypad	—	Hardware non-standard: -14	Change the default LED keypad to LCD keypad. Applicable to: 5.5 to 7.5kW. Note: 11kW and above with LCD keypad as standard.
Built-in brake chopper	—	Hardware non-standard: -06	Built-in brake chopper. Applicable to: 18.5 to 110 kW.
Built-in DC reactor	—	Hardware non-standard: -64	Built-in DC reactor. Applicable to: 18.5 to 110 kW.
Resolver	—	Hardware non-standard: -63	The control board with resolver signal interface. Applicable to: 5.5 to 7.5kW, 0.75~3.7kW; without. 5.5~7.5kW; optional. 11~710kW; standard.
Open collector, push pull incremental encoder	EX-PG01	Hardware non-standard: -02	Encoder interface. Support separate ordering.
	EX-PG03	Hardware non-standard: -16	Encoder interface + encoder output. Support separate ordering.
	EX-PG20	EX-PG20	Encoder interface + 2-relay outputs. Support separate ordering.
TTL incremental encoder	EX-PG02	Hardware non-standard: -09	TTL encoder interface. Support separate ordering.
	EX-PG04	Hardware non-standard: -20	Encoder interface + encoder output (TTL output). Support separate ordering.
	EX-PG15	EX-PG15	Encoder interface + encoder output (OC output). Support separate ordering.
	EX-PG21	EX-PG21	Encoder interface + 2-relay outputs. Support separate ordering.
Relay extension card	EX-PG22	EX-PG22	Two relay outputs. Support separate ordering.
Modbus-RTU	—	—	The control board with RS485 as standard.
CANopen	EX-CA04	Hardware non-standard: -48	Support CANopen DS301, DS303, DS305. Support external installed. Support separate ordering.
Profibus-DP	EX-CA06	Hardware non-standard: -59	Support Profibus-DP DPV0. Support external installed. Support separate ordering.
ProfiNET	EX-CA13	Hardware non-standard: -PRT	With profiNet interface, TTL encoder interface and encoder output. Separate ordering is not supported.
Keypad extension cable	CB1-150	CB1-150	1.5-meters keypad cable.
	CB1-300	CB1-300	3-meters keypad cable.
Keypad pallet	V9-DP05	V9-DP05	For the keypad to be installed on the external control cabinet.

Terminal Wirings

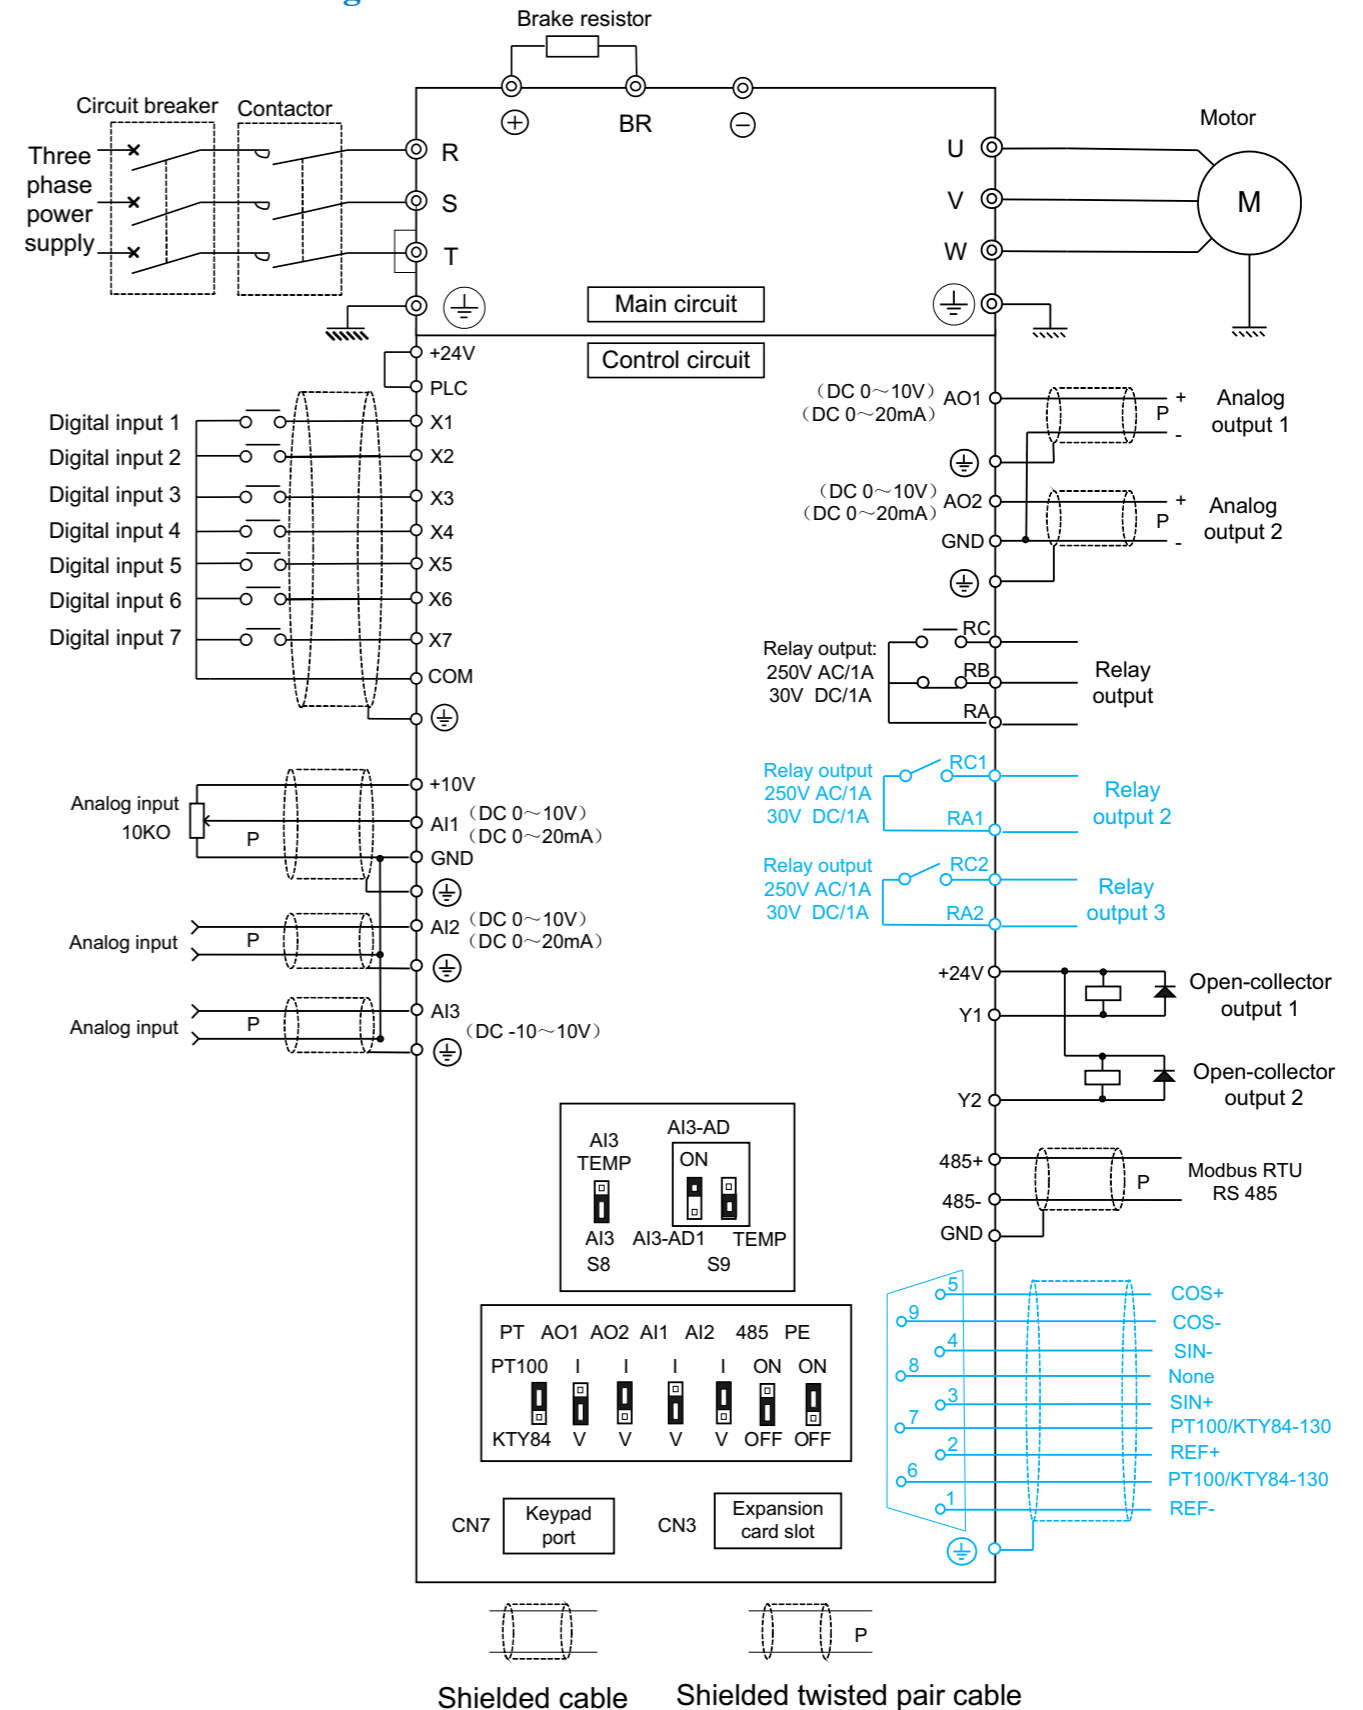

The black part is a standard function of V9-H-4T7.5G/11L and below, and comes standard with LED keyboard
The blue part is the V9-H-4T11G/15L and above power level increase function, standard LCD keyboard

V9 Series Universal Variable Speed AC Drives

High performance, Reliability, Flexibility, Convenience



Typical Application Selection List

Application Field	Application Device	Mode	Application Characteristics
Standard Series Product	2AC220V: V9-H-2S**G (from 0.4kW to 2.2kW) 3AC220V: V9-H-2T**G (from 0.4kW to 132kW) 3AC380V: V9-H-4T**G/**L (from 0.75kW to 710kW) 3AC690V: V9-H-6T**G (from 15kW to 710kW)		
Machine tool	Machine tool spindle	V9-H	Position loop control, orientation control, EtherCAT communication (VA series), 2nd encoder interface, can be matched with a variety of host computers.
	CNC engraving and milling machine	V9-H	Excellent field weakening control algorithm can maintain the speed stable when running in deep field weakening state.
	NC drilling rig	V9-H-H3	Maximum speed is up to 250,000rpm.
	Grinder	V9-H	High-speed operation, stable, reliable and fault-free.
	Speed control without encoder	V9-H	Even when running in open loop, it still has great cutting force and high speed stability accuracy.
Plastic and metal processing	Injection molding machine (Asynchronous motor)	V9-I	Standard VFD with injection molding machine interface card.
	Injection molding machine (Asynchronous motor)	V9-J	Integrated energy-saving control cabinet, with power frequency and variable frequency conversion switching.
	Injection molding machine (Synchronous motor)	V9-I	Pressure control, flow control, high energy saving effect and higher efficiency. Applicable to electrohydraulic mixing injection molding machine.
	Extruder	V9-H	Large extrusion force, no tripping, uniform rate of flow.
	Die-casting machine	V9-H	Fast speed, large torque, good multi-pump cascade synchronization performance.
Fan and pump	Blow molding machine	V9-I	high energy saving effect, with power frequency and variable frequency conversion switching.
	Fan	V9-H	With speed sensor-less flying start function.
	Pump (water supply)	V9-H-P0	Multiple sleep and wake-up functions to meet different requirements. with Modbus-RTU convenient communication with various controllers. Also with address conversion function, it is convenient to communicate with various controllers without changing the controller's program.
	Central air-conditioning / cold storage	V9-H-P0	Realize constant temperature control and high energy saving rate.
	Air compressor	V9-H	Support PM motor and induction motor, large torque and fast pressure response, with Modbus-RTU convenient communication with various controllers. With address conversion function, convenient to communicate with various controllers without changing the controller's program.
	Maglev Centrifugal Blower	V9-H	Support PM motor and induction motor, support high switching frequency setting to meet the high-speed motor.
	Turbo Blower	V9-H	Smooth, fast and stable starting, small bearing friction. Support PM motor and induction motor, support high switching frequency setting to meet the high-speed motor.
Crane / lifting machine	Centrifuge	V9-H	Large torque, fast acceleration and deceleration, strong environmental adaptability and flying start function.
	Hoist mechanism	V9-GH	Mechanical brake control logic, large torque, quickly current limit function, conical motor control function.
	Traveling mechanism	V9-GA	Anti-swing function, smooth acceleration and deceleration, stepless speed regulation function.
	Tower crane	V9-GH	Wide voltage range adaptability, the hook is controlled stable without shaking, easy to operate, fast.
	Construction elevator	V9-SY	Integrated control cabinet or inverter are optional.
	Elevator	AICE	Integrated elevator controller, integrated elevator control cabinet, electrical package.
Escalator	Escalator	V9-H	Through infrared sensor, the speed automatically switches to low speed or high speed operation, and the acceleration and deceleration process is smooth without impact.


Application Field	Application Device	Mode	Application Characteristics
Oil field	Walking-beam pumping unit	V9-U	Support synchronous motor and asynchronous motor, with resolver interface configured by default.
	Tower pumping unit	V9-U	High energy saving rate, also has current limit function to meet the actual oil well conditions.
	Oil transfer pump	V9-H	Auto start and stop according the actual pressure.
Textile industry	Spinning frame	V9-B	Through hole installation mode, the heat-sink is exposed at the back of the control cabinet for easy cleaning.
	Spinning frame	V9-H	Universal installation mode, with multi-step PLC function, under voltage control function to avoid wire breakage caused by accidental power failure.
	Terylene Spring Machine	V9-H	Process PID realizes high precision synchronization.
	Winder	V9-H	With multi-step PLC function, set operation process curve according to actual requirements.
	Circular machine	V9-H	Large starting torque, strong adaptability to wide range voltage fluctuation.
Metal processing	Dual inverter steel wire drawing machine	V9-T	The drawing motor and take-up motor working together.
	Straight line wire drawing machine	V9-T	Smooth control, with pendulum or without pendulum control mode can be selected according to the actual requirements.
	Fine wire drawing machine	V9-T	Minimum 0.001mm fine wire.
	Power pay-off frame	V9-T	Synchronous operation, good speed following performance.
	Replace torque motor	V9-H	Open-loop torque control, high reliability, low maintenance cost.
	Steel bar cutting machine	V9-H	Fixed length cutting, high precision.
	Cold rolling mill	V9-T	Good synchronization performance, fast speed following and fast torque response.
Printing and packaging industry	Slitting machine / Compounding machine	V9-T	Accurate roll diameter calculation ensures stable tension of winding and unwinding.
	Reeling waste side machine / Re-reeling machine	V9-T	With wire break warning, automatic stop, pendulum and floating roll in place at one time.
	Blow molding machine	V9-H	Excellent acceleration and deceleration performance to ensure product consistency.
	Coating machine/ Creasing machine	V9-T	Toque control with encoder can be used to draw 30g ultra-thin paper.
	Leather winding machine	V9-H	Torque control without encoder, torque control and speed control switching smoothly.
	Fishing net machine / Netting machine	V9-H	Torque control without encoder.
	Paper making machine	V9-H	Common DC bus, multi-drive series products are also available.
	Rotary knife	V9-H	Fast response, fast cutting speed, high cutting accuracy. Master-follower synchronization is also available.
	Material receiving machine	V9-H	Under torque control, high torque reference and stable operation.
Stone, brick, and wood industry	Wire saw machine	V9-H	Torque control, uniform cutting force, large torque at low speed.
	Brick machine	V9-H	High energy saving rate, large torque, fast lifting and lowering.
	Wood veneer lathe	V9-H	Quickly start, quickly stop, strong resistance to voltage fluctuation, large torque, speed stable running, high working efficiency and high yield rate.
	Wood guillotine machine	V9-H	
	Wood planning machine	V9-H	
Industrial power supply	Electromagnetic stirring drive	V9-H-EMS	Special function for electromagnetic stirring, multiple mixing modes available. Frequency and voltage can be adjusted independently, frequency and current can be adjusted independently.
	Variable frequency power supply	V9-H-C9	Frequency and voltage can be adjusted independently, also has voltage acceleration and deceleration time.
	Resonant power supply	V9-H-C9.01	With frequency scan, voltage rise, keep voltage functions, manual test, semi-automatic test and full-automatic test functions. Voltage monitoring, current monitoring, flashover protection, etc.
	Middle frequency power supply	V9-H-C9.02	Frequency and voltage can be adjusted independently. Maximum frequency up to 3000Hz.
Other Application	Industrial washing machine	V9-H	High environmental adaptability, large washing capacity, stable operation even under highspeed dehydration.
	Musical fountain	V9-H	Strong anti-interference ability will not interfere with audio signal. Current limit is stable to avoid tripping.
	Ceramic machinery	V9-H	Strong protection ability, corrosion resistance of PCB board, stable operation and fault-free.
	Mechanical vibrator	V9-H	Excellent current limit function ensures stable operation of forward and reverse switching.
	Tubular pile machine / Pile driver / Ramming machine	V9-H	Multi-step speed running and bulldozer characteristics ensure stable current control without tripping.
	Electric door	V9-H	Self-check function after the electric door is in place, automatic stop when the limit signal fails.
	Belt conveyor	V9-H-6T	Automatic load balancing function and master-slave following function.
	Ball mill/ Grinder/ Crusher	V9-H	Multi-step speed operation, time can be set to achieve automatic shutdown.
	Mixer	V9-H	Large torque at each speed and the mixing effect is very good.
	Treadmill / Running machine	V9-H-2T	High speed stability accuracy, strong load capacity, no numbness.
	Electric climbing aid	V9-H	Vector control technology, excellent dynamic performance, accurate torque control, automatic speed adaptation, reduce the physical consumption of maintenance personnel and improve work efficiency.
	Electric screwdriver	V9-H	Speed upper limit, torque control and the output torque reach torque reference.
Dynamometer	V9-H	High accuracy of speed control and speed stabilization, torque control has fast response and high accuracy.	

Applications of Typical Industries



Electric Vehicle Controller

- Simple and convenient wiring and prominent structure design of high protection level.
- Accurate torque control perfectly matches with engine working.
- Energy saving mode, super battery endurance.
- Built-in CAN-BUS communication with high stability, reliability and strong anti-interference capability.



Injection Molding Industry

- Both products are available: Integrated Energy-Saving Control Cabinet or dedicated drive for Injection Molding Machine.
- Unified asynchronous servo motor and synchronous servo motor control with pressure and flow control.
- Without high-pressure throttle and loss of overflowed energy, energy-saving rate can reach to 25%~70%.
- Design of independent duct makes rear parts and top fan can be convenient to disassemble and easy to maintain; it also has strong environmental adaptability and high protection level.

Air Compressor Industry

- Large torque, stable running speed and stable pressure control.
- High reliability and long service life.
- Synchronous motor drive, asynchronous motor drive, magnetic suspension motor drive, air suspension motor drive, etc.
- With intelligent sleep and low pressure wake-up function, Energy saving rate can reach to 20%~50%.
- Standard Modbus-RTU communication can be compatible with various air compressor controllers.



Machine Tool Industry

- Excellent vector control and excellent field weakening algorithm ensure large low speed torque and strong high-speed cutting force.
- Support multiple encoder types: sine /cos encoder, incremental encoder, resolver, with encoder frequency division output, and second encoder input function.
- Special function for machine tool spindles: EtherCAT communication, second encoder input, position reference, etc.
- Successfully drive 250000 RPM drilling machine.



Ceramics Machinery

- Strong adaptability of environmental temperature.
- Professional solutions for anti-interference and lightning protection.
- Reliable and stable operation, and corrosion prevention.
- Trip-less, reliable control and protection for power modules.

Oil Field



- Special inverter for pumping unit, stable control even without RBU(s) or DBU(s).
- Higher power saving effect, less harmonic and reactive current.
- High quality Outdoor Control Cabinet is available, with constant temperature control, it can work reliably in low temperature environment for a long time.
- It is applicable to control synchronous motor and asynchronous motor.
- AFE(s) and RBU(s) are available for higher energy saving effect and higher power factor requirements.

Elevator Industry



- Elevator integrated controller and electrical package are available, it can be selected according to customer's requirements.
- Optimized CAN, Modbus communication technology, it has quickly communication speed and strong anti-interference ability.
- With a variety of safety protection functions, and meet the latest standards.
- Application of Internet of Things technology to achieve remote monitoring, commissioning and upgrade firmware.

Mine Winch



- Abundant experience in the renovation of winch, provides different types of winch renovation solutions.
- Vector technology platform provides excellent control performance for the winch
- A variety of protection functions to ensure more secure and reliable system.
- Intelligent fault diagnosis to reduce the cost of maintenance and workloads.

Variable Frequency Power



- Voltage and frequency can be controlled separately, so do current and frequency.
- Special function for electromagnetic stirring, with multiple operation modes.
- With acceleration and deceleration function of voltage and frequency.
- With SPWM and SVPWM modulation mode.
- With over-modulation function.



Textile industry

- Reduce the rate of breakage and improve the efficiency of production.
- Specially external heat sink, easy to clean the cotton in the heat sink.
- Unique voltage control function ensures normal deceleration in case of instantaneous power failure.
- With multi-step PLC function, user can set it according to actual application.

Wood Processing

- Built-in technology algorithm of rotary cutting machine, rolling machine, and peeling machine.
- Wide voltage range, particularly suitable for harsh conditions in the rural power grid.
- High precision and fast rotary cutting to increase the yield under the premise of keeping the uniformity of thickness for the wood veneer.
- Stable and reliable work makes customers enjoy high quality green power.



Printing and Packaging Industry

- High performance vector control and torque control technology can achieve the constant linear speed control and constant tension control.
- Applicable for devices of cutting machine, coating machine, paper-made machine, printing machine, compound machine, rolling dyeing machine, etc.
- With torque control without encoder speed feedback, it can replace torque motor widely.



Municipal Engineering

- Central air conditioning/refrigeration house: for constant temperature control, high efficiency of energy-saving, and low noise.
- Centralized water supply in constant pressure: Built-in one-for-all expansion card for water supply, multi-period water supply in constant pressure with timing loop, solving the phenomena of overflowing and water hammer in the switching process.
- Sewage treatment: Built-in adaptive torque control in the main and auxiliary drive of centrifugal equipment for quick acceleration and deceleration, suitable for harsh environment.
- Various fan drives: Designed for the fan, high efficiency of energy-saving, noise optimization, built-in automatic speed tracking function, maximum power up to 800kW.



Crane

- Excellent torque control, reliable brake control sequence.
- Professional crane control functions: speed monitoring, torque monitoring, torque verification, power optimization, position counting, anti-swing function for gantry, trolley and slew, etc.
- Extensively applied to: port, shipping, ocean engineering, mine, architecture, metallurgy, factory and various kinds of industries' lifting machines.



Stone Processing

- Simple and convenient operation, and less connection cable.
- Smooth running curve to reduce the stone damage rate, and smooth starting to reduce mechanical damage and maintenance costs.
- Providing the constant tension control with anti-breakage rope, main and auxiliary functions for frequency reference safe stopping function, and alarm prompt function.



Shenzhen V&T Technologies Co.,Ltd.
www.vectorque.com